



#### Jinhua Great Garden Tools Co.,Ltd. 金华戈瑞泰园林工具有限公司

Add: Jiangdong Industrial Zone, Jindong District, Jinhua,

Zhejiang,China

Mob: 0086 13516791870 Tel: 0086 0579-89126023

E-mail: kevin@jhgreat.com Website: www.jhgreat.com Kevin

Kevin

















Power: 0.9kw

Fuel Consumption: 680g/kW.h

#### PRODUCT PARAMETER

MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	25.4CC
Engine Speed:	11800RPM
Ldling Speed:	2800-3200RPM
Max.Output:	0.9kw/8500r/min
Starting System:	Single Start
Guide bar size:	10''(25cm)/12''(30cm)
Chain pitch:	3/8
Fuel tank capacity	260ml
Oil tank capacity	130ml
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	4.3kg/3.6kg
Carton Size:	28*23*25cm
Qty:	20GP:1660Sets/40HQ:4200Sets

## GASOLINE CHAIN SAW



Power: 0.9kw

Fuel Consumption: 680g/kW.h

NODOO! ! AIMAIVIL! LIK	
MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	25.4CC
Engine Speed:	11800RPM
Ldling Speed:	2800-3200RPM
Max.Output:	0.9kw/8500r/min
Starting System:	Recoil Start
Guide bar size:	10''(25cm)/12''(30cm)
Chain pitch:	3/8
Fuel tank capacity	260ml
Oil tank capacity	130ml
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	4.3kg/3.6kg
Carton Size:	28*23*25cm
Qty:	20GP:1660Sets/40HQ:4200Sets



**MODEL:** 

CS5200



Power: 1.9kw

Fuel Consumption: 860g/kW.h

#### PRODUCT PARAMETER

(CHEAP PRICE)

See all to be a second of the season of the second of the	
MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	52CC
Engine Speed:	11200RPM
Ldling Speed:	2800-3200RPM
Max.Output:	1.9kw/8000r/min
Starting System:	Single Start
Guide bar size:	16''(40cm)/18''(45cm)/20''(50cm)
Chain pitch:	0.325" or 3/8
Fuel tank capacity	560ml
Oil tank capacity	260ml
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	7.2kg/6.6kg
Carton Size:	57.5*24.5*31(10)
Qty:	20GP:950Sets/40GP:1920Sets/40HQ:2350Sets

## GASOLINE CHAIN SAW

**MODEL:** 



(CHEAP PRICE)

Power: 2.16kw

C\$5800

Fuel Consumption: 856g/kW.h

KODOO!! AKAIVIL!LK	
MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	58CC
Engine Speed:	11200RPM
Ldling Speed:	2800-3200RPM
Max.Output:	2.16kw/8000r/min
Starting System:	Recoil Start
Guide bar size:	16''(40cm)/18''(45cm)/20''(50cm)/22''(55cm)
Chain pitch:	0.325" or 3/8
Fuel tank capacity	560ml
Oil tank capacity	260ml
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	7.2kg/6.6kg
Carton Size:	57.5*24.5*31(10)
Qty:	20GP:950Sets/40GP:1920Sets/40HQ:2350Sets



**MODEL:** 

CS5800A



(USE GOOD QUALITY CYLINDER, CRANKSHAFT, CARBURETOR)

Power: 2.47kw

Fuel Consumption: 725g/kW.h

#### PRODUCT PARAMETER

MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	58CC
Engine Speed:	11200RPM
Ldling Speed:	2800-3200RPM
Max.Output:	2.47kw/9000r/min
Starting System:	Recoil Start
Guide bar size:	18''(45cm)/20''(50cm)/22''(55cm)/24''(60cm)
Chain pitch:	0.325" or 3/8
Fuel tank capacity	560ml
Oil tank capacity	260ml
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	7.2kg/6.6kg
Carton Size:	57.5*24.5*31(10)
Qty:	20GP:950Sets/40GP:1920Sets/40HQ:2350Sets

## GASOLINE CHAIN SAW

**MODEL:** 

CS5800A-1



DON'T NEED MIX FULE MODEL

(USE GOOD QUALITY CYLINDER, CRANKSHAFT, CARBURETOR)

Power: 2.47kw

Fuel Consumption: 725g/kW.h

RODOCT PARAIVILTER	
MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	58CC
Engine Speed:	10500RPM
Ldling Speed:	2800-3200RPM
Max.Output:	2.47kw/9000r/min
Starting System:	Recoil Start
Guide bar size:	18''(45cm)/20''(50cm)/22''(55cm)/24''(60cm)
Chain pitch:	0.325" or 3/8
Fuel tank capacity	560ml
Oil tank capacity	260ml
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	7.2kg/6.6kg
Carton Size:	57.5*24.5*31(10)
Qty:	20GP:950Sets/40GP:1920Sets/40HQ:2350Sets



**MODEL:** 

C S 5 8 0 0 B



(USE BEST QUALITY CYLINDER, CRANKSHAFT, CARBURETOR)

Power: 2.5kw

Fuel Consumption: 726g/kW.h

#### PRODUCT PARAMETER

MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	58CC
Engine Speed:	11200RPM
Ldling Speed:	2800-3200RPM
Max.Output:	2.5kw/9000r/min
Starting System:	Recoil Start
Guide bar size:	18''(45cm)/20''(50cm)/22''(55cm)/24''(60cm)
Chain pitch:	0.325" or 3/8
Fuel tank capacity	560ml
Oil tank capacity	260ml
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	7.2kg/6.6kg
Carton Size:	57.5*24.5*31(10)
Qty:	20GP:950Sets/40GP:1920Sets/40HQ:2350Sets

## GASOLINE CHAIN SAW

**MODEL:** 

CS6500



(USE BEST QUALITY CYLINDER, CRANKSHAFT, CARBURETOR)

Power: 2.8kw

Fuel Consumption: 582g/kW.h

KODOCI I AKAIVILI LK	
MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	60CC
Engine Speed:	12000RPM
Ldling Speed:	2800-3200RPM
Max.Output:	2.8kw/8500r/min
Starting System:	Recoil Start
Guide bar size:	18''(45cm)/20''(50cm)/22''(55cm)/24''(60cm)
Chain pitch:	0.325" or 3/8
Fuel tank capacity	560ml
Oil tank capacity	260ml
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	7.2kg/6.6kg
Carton Size:	57.5*24.5*31(10)
Qty:	20GP:950Sets/40GP:1920Sets/40HQ:2350Sets





#### PRODUCT PARAMETER

MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	25.4CC
Engine Speed:	9200RPM
Ldling Speed:	2800-3200RPM
Max.Output:	0.8kw/8000r/min
Starting System:	Single Start / Recoil Start
Diameter of Aluminum Pipe:	26 M M
Form of Carburetor:	Diaphragm
Fuel tank capacity:	600ML
Mixed Fuel Ratio:	25:1/40:1
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	6.5KG/5.9KG
Carton Size:	102.8*22*26(10)CM
Qty:	20GP:675Sets/40HQ:1650Sets



MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinde
Displacement:	32.6CC
Engine Speed:	9200RPM
Ldling Speed:	2800-3200RPM
Max.Output:	1kw/8500r/min
Starting System:	Single Start / Recoil Start
Diameter of Aluminum Pipe:	26MM / 28MM
Form of Carburetor:	Diaphragm
Fuel tank capacity:	1000ML
Mixed Fuel Ratio:	25:1/40:1
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	7.2KG/6.6KG
Carton Size:	105*27*27(10) CM
Qty:	20GP:525Sets/40HQ:1280Sets

## BRUSH CUTTER SERIES

Jinhua Great Garden Tools Co.,Ltd.
Professional Manufacturer of Garden Machinery





MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	42.7CC
Engine Speed:	9000RPM
Ldling Speed:	2800-3200RPM
Max.Output:	1.3kw/8500r/min
Starting System:	Single Start / Recoil Start
Diameter of Aluminum Pipe:	26MM / 28MM
Form of Carburetor:	Diaphragm
Fuel tank capacity	1200ML
Mixed Fuel Ratio:	25:1/40:1
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	8.7KG/7.6KG
Carton Size:	33*23*33 165*10*10CM
Qty:	20GP:665Sets/40HQ:1620Sets



MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	51.7CC
Engine Speed:	9000RPM
Ldling Speed:	2800-3200RPM
Max.Output:	1.65kw/8500r/min
Starting System:	Single Start / Recoil Start
Diameter of Aluminum Pipe:	26MM / 28MM
Form of Carburetor:	Diaphragm
Fuel tank capacity	1200ML
Mixed Fuel Ratio:	25:1/40:1
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	9.0KG/7.8KG
Carton Size:	106*27*29(9) CM
Qty:	20GP:506Sets/40HQ:1250Sets

# BRUSH CUTTER SERIES

Jinhua Great Garden Tools Co.,Ltd.
Professional Manufacturer of Garden Machinery





#### PRODUCT PARAMETER

MODEL		
IVIODEL		
Feature:	4-Stroke, Forced Air Coolin	g, Single Cylinder
Displacement:	35.8CC	31CC
Engine Speed:	10000RPM	
Ldling Speed:	2800-3200RPM	
Max.Output:	1.0kw/6500r/min	0.8kw/7000rpm
Starting System:	Recoil Start	
Diameter of Aluminum Pipe:	26 M M	
Form of Carburetor:	Diaphragm	
Fuel tank capacity	630ml	700ml
Oil tank capacity	80ml	
Fule Type:	Petrol/Gasoline	
Customized support	OEM, ODM	
G.W/N.W:	10.8kg/10kg	10kg/9kg
Carton Size:	35x31x23.5cm 165x11x11c	m
Qty:	20GP:665Sets/40HQ:1620Se	ets



ODUCT PARAMETER	
MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	40.2CC
Engine Speed:	10000RPM
Ldling Speed:	2800-3200RPM
Max.Output:	1.45kw/7200r/min
Starting System:	Single Start / Recoil Start
Diameter of Aluminum Pipe:	28 M M
Form of Carburetor:	Float
Fuel tank capacity	560ml
Oil tank capacity	260ml
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	9kg/8kg
Carton Size:	28x23x33.5cm 165x11x11cm
Qty:	20GP:680Sets//40HQ:1680Sets

Jinhua Great Garden Tools Co.,Ltd.
Professional Manufacturer of Garden Machinery



# GASOLINE BRUSH CUTTER

**MODEL:** 

BG520



#### PRODUCT PARAMETER

MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	51.7CC
Engine Speed:	9000RPM
Ldling Speed:	2800-3200RPM
Max.Output:	1.65kw/8000r/min
Starting System:	Single Start , Recoil Start
Diameter of Aluminum Pipe:	26 M M
Form of Carburetor:	Diaphragm
Fuel tank capacity	1200ml
Mixed Fuel Ratio:	25:1/40:1
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	10.2kg/9.5kg
Carton Size:	41*29.5*32.5 151*10*10 CM
Qty:	20GP:500Sets/40HQ:1250Sets

# GASOLINE BRUSH CUTTER



A ROMANDO DE LA COMPANSIONA DEL COMPANSIONA DE LA COMPANSIONA DE LA COMPANSIONA DEL COMPANSIONA DE LA COMPANSIONA DE LA COMPANSIONA DEL COMPANSIONA DE LA COMPANSIONA DEL COMP		
MODEL	G X 3 5	139F
Feature:	4-Stroke, Forced Air Cooling,	Single Cylinder
Displacement:	35.8CC	31CC
Engine Speed:	10000RPM	
Ldling Speed:	2800-3200RPM	
Max.Output:	1.0kw/6500r/min	0.8kw/7000rpm
Starting System:	Recoil Start	
Diameter of Aluminum Pipe:	26 M M	
Form of Carburetor:	Diaphragm	
Fuel tank capacity	630ml	700ml
Mixed Fuel Ratio:	80ml	
Cutting Head:	Metal blade or Nylon head	
Customized support	OEM, ODM	
G.W/N.W:	11.6kg/10.8kg	10.8kg/10kg
Carton Size:	41*29.5*32.5 151*10*10 CM	
Qty:	20GP:500Sets/40HQ:1250Sets	



# GASOLINE BRUSH CUTTER



#### PRODUCT PARAMETER

MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	51.7CC
Engine Speed:	9000RPM
Ldling Speed:	2800-3200RPM
Max.Output:	1.65kw/8500r/min
Starting System:	Recoil Start
Guide bar size:	10 inch / 12 inch
Chain pitch:	3/8
Fuel tank capacity:	1200ml
Mixed Fuel Ratio:	25:1/40:1
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	14.6kg/13.8kg
Carton Size:	108.5*27*30(10) CM
Qty:	20GP:460Sets/40HQ:1130Sets



MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	51.7CC
Engine Speed:	9000RPM
Ldling Speed:	2800-3200RPM
Max.Output:	1.65kw/8500r/min
Starting System:	Recoil Start
Guide bar size:	10 inch / 12 inch
Chain pitch:	3/8
Fuel tank capacity	1200ml
Mixed Fuel Ratio:	25:1/40:1
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	16.2kg/14.6kg
Carton Size:	34*33*42 109.5*25.5*13
Qty:	20GP:320Sets/40HQ:820Sets

Jinhua Great Garden Tools Co.,Ltd.
Professional Manufacturer of Garden Machinery



# MODEL: GRW 5 2 0

#### PRODUCT PARAMETER

MODEL  Feature: 2-Stroke, Forced Air Cooling, Displacement: 51.7CC Engine Speed: 9000RPM	
Displacement: 51.7CC	
	Single Cylinder
Engine Speed: 9000RPM	
Ldling Speed: 2800-3200RPM	
Max.Output: 1.65kw/8500r/min	
Starting System: Recoil Start	
Blade: 40T/2T/Nylion Header	
Form of Carburetor: Diaphragm	
Fuel tank capacity 1200ml	
Mixed Fuel Ratio: 25:1/40:1	
Fule Type: Petrol/Gasoline	
Customized support OEM, ODM	
G.W/N.W: 13.2kg/12.2kg	
Carton Size: 57*46*57 CM	
Qty: 20GP:200Sets/40HQ:460Sets	

# GASOLINE TILLER

**MODEL:** 

G R M C 5 2 0



MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinde
Displacement:	51.7CC
Engine Speed:	8500RPM
Ldling Speed:	2800-3200RPM
Max.Output:	1.65kw/8500r/min
Starting System:	Recoil Start
Working Width:	250MM
Form of Carburetor:	Diaphragm
Fuel tank capacity	1200ml
Mixed Fuel Ratio:	25:1/40:1
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	16.5kg/15.3kg
Carton Size:	62*32*38 CM
Qty:	20GP:365Sets/40HQ:900Sets



# GASOLINE TILLER



#### PRODUCT PARAMETER

Feature: 2-Stroke, Forced Air Cooling, Single Cylind Displacement: 63.3CC Engine Speed: 8500RPM  Ldling Speed: 2800-3200RPM  Max.Output: 2.3kw/8500r/min Starting System: Recoil Start Working Width: 450MM Form of Carburetor: Diaphragm Fuel tank capacity 1200ml Mixed Fuel Ratio: 25:1/40:1 Fule Type: Petrol/Gasoline Customized support OEM, ODM G.W/N.W: 29.2kg/30.8kg Carton Size: 57*46*57 CM Qty: 20GP:200Sets/40HQ:460Sets		
Displacement: 63.3CC Engine Speed: 8500RPM  Ldling Speed: 2800-3200RPM  Max.Output: 2.3kw/8500r/min  Starting System: Recoil Start  Working Width: 450MM  Form of Carburetor: Diaphragm  Fuel tank capacity 1200ml  Mixed Fuel Ratio: 25:1/40:1  Fule Type: Petrol/Gasoline  Customized support OEM, ODM  G.W/N.W: 29.2kg/30.8kg  Carton Size: 57*46*57 CM	MODEL	
Engine Speed: 8500RPM  Ldling Speed: 2800-3200RPM  Max.Output: 2.3kw/8500r/min  Starting System: Recoil Start  Working Width: 450MM  Form of Carburetor: Diaphragm  Fuel tank capacity 1200ml  Mixed Fuel Ratio: 25:1/40:1  Fule Type: Petrol/Gasoline  Customized support OEM, ODM  G.W/N.W: 29.2kg/30.8kg  Carton Size: 57*46*57 CM	Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Ldling Speed: 2800-3200RPM  Max.Output: 2.3kw/8500r/min  Starting System: Recoil Start  Working Width: 450MM  Form of Carburetor: Diaphragm  Fuel tank capacity 1200ml  Mixed Fuel Ratio: 25:1/40:1  Fule Type: Petrol/Gasoline  Customized support OEM, ODM  G.W/N.W: 29.2kg/30.8kg  Carton Size: 57*46*57 CM	Displacement:	63.3CC
Max.Output:  Starting System:  Working Width:  Form of Carburetor:  Fuel tank capacity  Mixed Fuel Ratio:  Fule Type:  Customized support  G.W/N.W:  Carton Size:  Diaphragm  1200ml  1200ml  1200ml  1200ml  1200ml  1200ml  25:1/40:1  Petrol/Gasoline  OEM, ODM  29.2kg/30.8kg	Engine Speed:	8500RPM
Starting System:  Working Width:  Form of Carburetor:  Diaphragm  Fuel tank capacity  Mixed Fuel Ratio:  Fule Type:  Customized support  G.W/N.W:  Carton Size:  Recoil Start  450MM  450MM  450MM  450MM  Petrol/Gagm  Petrol/Gasoline  Customized support  OEM, ODM  29.2kg/30.8kg	Ldling Speed:	2800-3200RPM
Working Width: 450MM  Form of Carburetor: Diaphragm  Fuel tank capacity 1200ml  Mixed Fuel Ratio: 25:1/40:1  Fule Type: Petrol/Gasoline  Customized support OEM, ODM  G.W/N.W: 29.2kg/30.8kg  Carton Size: 57*46*57 CM	Max.Output:	2.3kw/8500r/min
Form of Carburetor:  Diaphragm  Fuel tank capacity  Mixed Fuel Ratio:  Petrol/Gasoline  Customized support  G.W/N.W:  Carton Size:  Diaphragm  1200ml  Petrol/Gasoline  OEM, ODM  29.2kg/30.8kg	Starting System:	Recoil Start
Fuel tank capacity  Mixed Fuel Ratio: 25:1/40:1  Fule Type: Petrol/Gasoline  Customized support OEM, ODM  G.W/N.W: 29.2kg/30.8kg  Carton Size: 57*46*57 CM	Working Width:	450MM
Mixed Fuel Ratio: 25:1/40:1  Fule Type: Petrol/Gasoline  Customized support OEM, ODM  G.W/N.W: 29.2kg/30.8kg  Carton Size: 57*46*57 CM	Form of Carburetor:	Diaphragm
Fule Type: Petrol/Gasoline  Customized support OEM, ODM  G.W/N.W: 29.2kg/30.8kg  Carton Size: 57*46*57 CM	Fuel tank capacity	1200ml
Customized support OEM, ODM G.W/N.W: 29.2kg/30.8kg Carton Size: 57*46*57 CM	Mixed Fuel Ratio:	25:1/40:1
G.W/N.W: 29.2kg/30.8kg  Carton Size: 57*46*57 CM	Fule Type:	Petrol/Gasoline
Carton Size: 57*46*57 CM	Customized support	OEM, ODM
	G.W/N.W:	29.2kg/30.8kg
Qty: 20GP:200Sets/40HQ:460Sets	Carton Size:	57*46*57 CM
	Qty:	20GP:200Sets/40HQ:460Sets

# GASOLINE WATER PUMP

**MODEL:** 

GRWP520



RODUCT PARAMETER	
MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	51.7CC
Engine Speed:	8500RPM
Ldling Speed:	2800-3200RPM
Max.Output:	1.65kw/8500r/min
Starting System:	Recoil Start
Mass flow rate:	10m3/h
Water inlet diameter:	1inch
Fuel tank capacity	1200ml
Mixed Fuel Ratio:	25:1/40:1
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	7.2kg/6.6kg
Carton Size:	36*29*35 CM
Qty:	20GP:760Sets/40HQ:1850Sets



# GASOLINE EARTH AUGER



#### PRODUCT PARAMETER

MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	51.7CC
Engine Speed:	8500RPM
Ldling Speed:	2800-3200RPM
Max.Output:	1.65kw/8500r/min
Starting System:	Recoil Start
Auger bit (diameter):	10cm,15cm,20cm
Form of Carburetor:	Diaphragm
Fuel tank capacity	1200ml
Mixed Fuel Ratio:	25:1/40:1
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	19.3kg/18.6kg
Carton Size:	81*38*47CM
Qty:	20GP:195Sets/40HQ:465Sets
Qty:	20GP:195Sets/40HQ:465Sets

# GASOLINE EARTH AUGER



MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	63.3CC
Engine Speed:	8500RPM
Ldling Speed:	2800-3200RPM
Max.Output:	2.3kw/8500r/min
Starting System:	Recoil Start
Auger bit (diameter):	10cm,15cm,20cm,30cm
Form of Carburetor:	Diaphragm
Fuel tank capacity	1200ml
Mixed Fuel Ratio:	25:1/40:1
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	20.3kg/19.6kg
Carton Size:	81*38*47CM
Qty:	20GP:195Sets/40HQ:465Sets



# GASOLINE BLOWER

**MODEL:** 

GRB260



#### PRODUCT PARAMETER

MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	25.4CC
Engine Speed:	6800RPM
Ldling Speed:	2800-3200RPM
Max.Output:	0.8kw/9000r/min
Starting System:	Single Start/Recoil Start
Form of Carburetor:	Diaphragm
Average Air Volume:	0.16 m3/Sec
Fuel tank capacity	600ml
Mixed Fuel Ratio:	25:1 or 40:1
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	4.36kg/4.06kg
Carton Size:	39*24*34 CM
Qty:	20GP:860Sets/40HQ:2100Sets

# GASOLINE BLOWER

**MODEL:** 

GRB520

(BIG AIR FILTER)



NODOO!! ANAIVIE!EN	
MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	51.7CC
Engine Speed:	7200RPM
Ldling Speed:	2800-3200RPM
Max.Output:	1.65kw/7200r/min
Starting System:	Recoil Start
Form of Carburetor:	Diaphragm
Average Air Volume:	0.275 m3/Sec
Fuel tank capacity	1200ML
Mixed Fuel Ratio:	25:1 or 40:1
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	8kg/7.36kg
Carton Size:	45*34*45CM
Qty:	20GP:405Sets/40HQ:980Sets



# GASOLINE BLOWER

**MODEL:** 

GRB650



#### PRODUCT PARAMETER

MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	63.3CC
Engine Speed:	7500RPM
Ldling Speed:	2800-3200RPM
Max.Output:	2.3kw/9000r/min
Starting System:	Recoil Start
Form of Carburetor:	Diaphragm
Mixed Fuel Ratio:	25:1 or 40:1
Fuel tank capacity	1800ml
Average Air Volume:	0.36m3/Sec
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	10.8kg/10.2kg
Carton Size:	47*34.5*56.5CM
Qty:	20GP:300Sets/40HQ:730Sets



MODEL	GRBM650	GRBM520
Feature:	2-Stroke, Forced All	r Cooling, Single Cylinder
Displacement:	63.3CC	51.7CC
Engine Speed:	9000RPM	
Ldling Speed:	2800-3200RPM	
Max.Output:	2.3kw/8500r/min	1.65kw/8500r/min
Starting System:	Recoil Start	
Form of Carburetor:	Diaphragm	
Mixed Fuel Ratio:	25:1 or 40:1	
Fuel tank capacity	1200ml	
Application:	out board engine	
Fule Type:	Petrol/Gasoline	
Customized support	OEM, ODM	
G.W/N.W:	10.2kg/9.6kg	9.2kg/8.6kg
Carton Size:	110.5*27.5*30(12)C	M
Qty:	20GP:430Sets/40HQ	Q:1066Sets

Jinhua Great Garden Tools Co.,Ltd.
Professional Manufacturer of Garden Machinery



# GASOLINE HEDGE TRIMMER

**MODEL:** 




#### PRODUCT PARAMETER

MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinder
Displacement:	22.5CC
Engine Speed:	9000RPM
Ldling Speed:	2800-3200RPM
Max.Output:	0.65kw/9000r/min
Starting System:	Single Start/Recoil Start
Form of Carburetor:	Diaphragm
Mixed Fuel Ratio:	25:1 or 40:1
Fuel tank capacity	600ml
Cutter type:	Double blade 660mm
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	5.2kg/6.6kg
Carton Size:	109.5*24*23.5(12) CM
Qty:	20GP:600Sets/40HQ:1500Sets

# GASOLINE HEDGE TRIMMER

**MODEL:** 

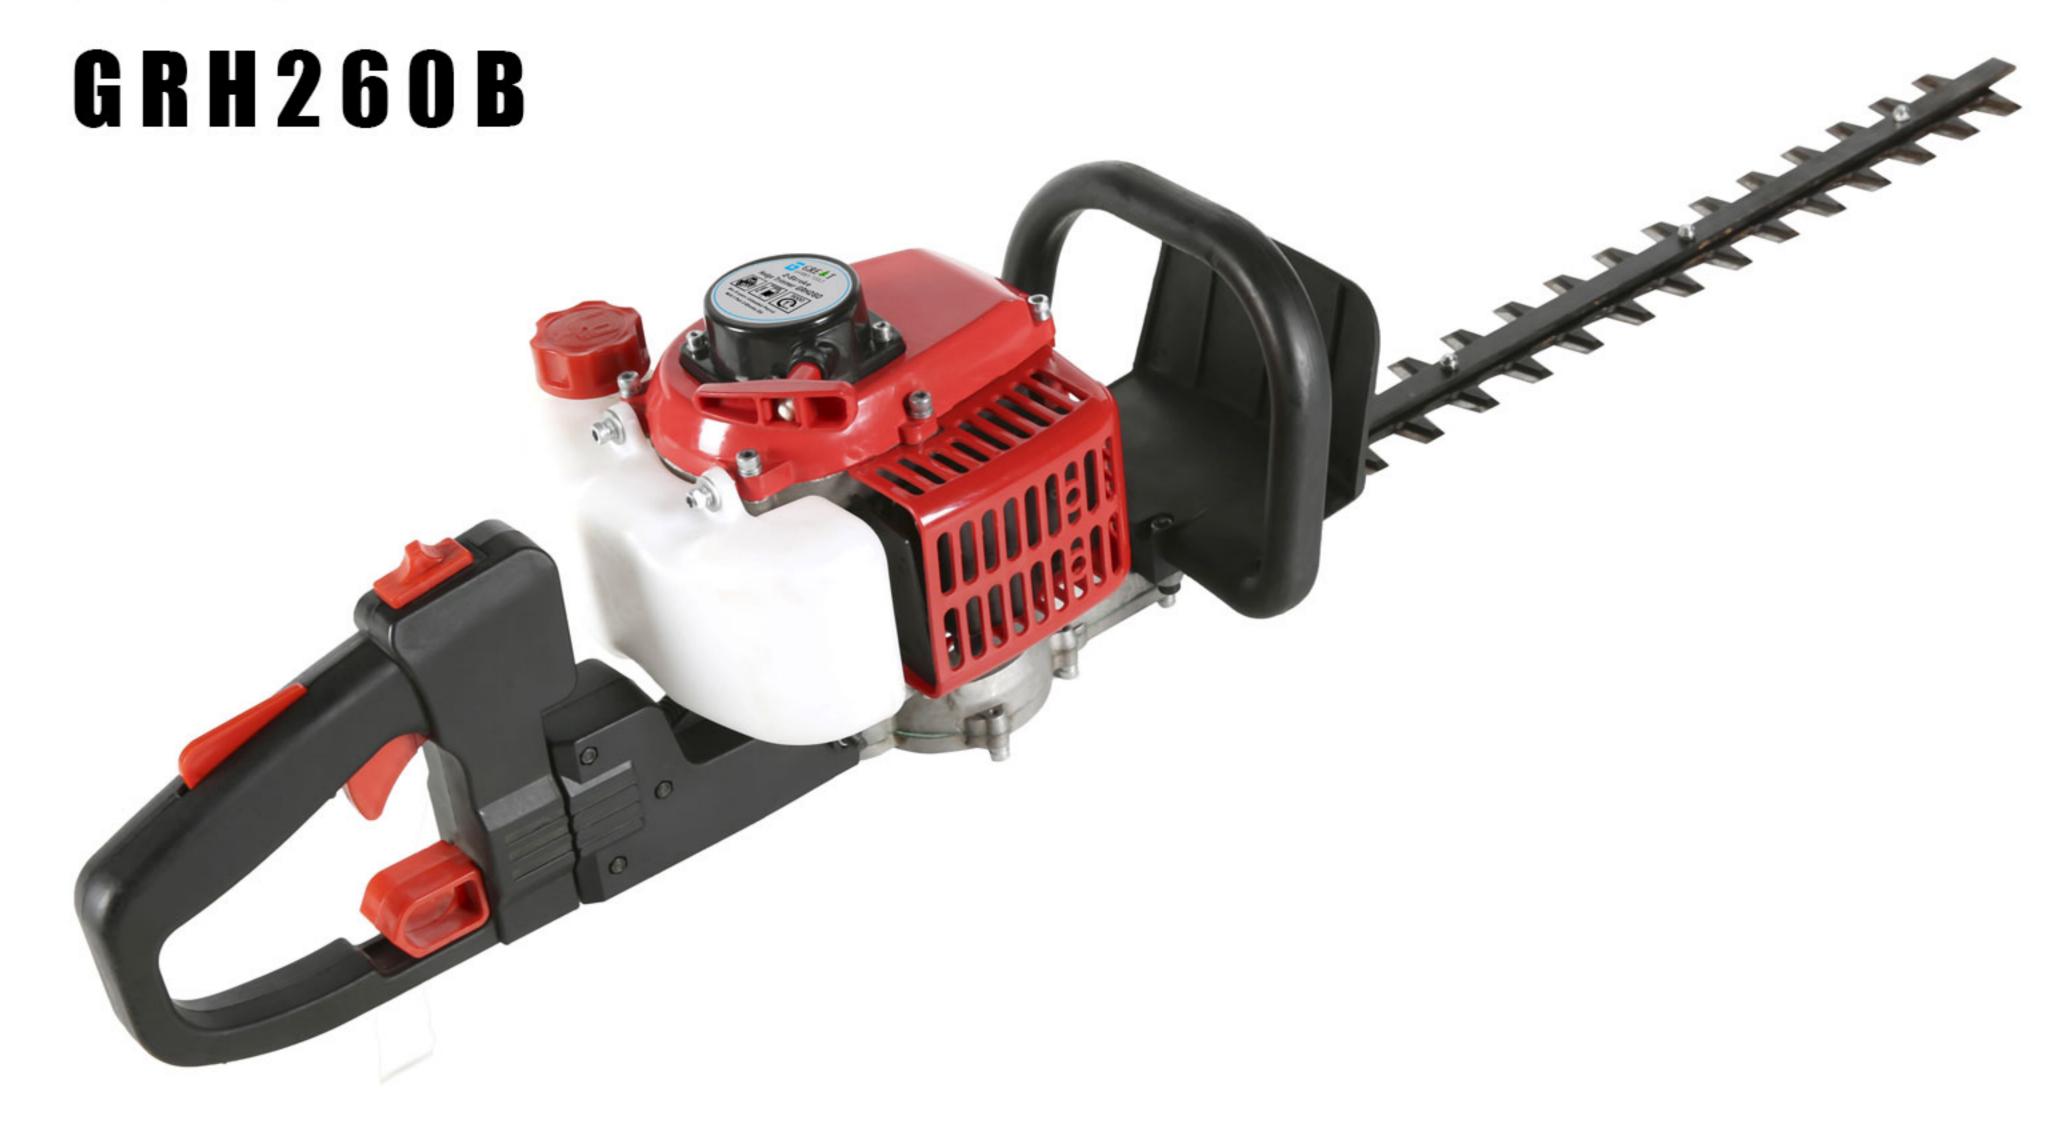

MODEL	
MODEL	
Feature:	2-Stroke, Forced Air Cooling, Single Cylinde
Displacement:	22.5CC
Engine Speed:	9000RPM
Ldling Speed:	2800-3200RPM
Max.Output:	0.65kw/9000r/min
Starting System:	Single Start/Recoil Start
Form of Carburetor:	Diaphragm
Mixed Fuel Ratio:	25:1 or 40:1
Fuel tank capacity	600ml
Cutter type:	Double blade 660mm
Fule Type:	Petrol/Gasoline
Customized support	OEM, ODM
G.W/N.W:	5.2kg/6.6kg
Carton Size:	109.5*24*23.5(12) CM
Qty:	20GP:600Sets/40HQ:1500Sets